


KDxxxx designates a generator set with a Tier 2 EPA-Certified engine.
KDxxxx-F designates a 60 Hz generator set with a fuel optimized engine.



Ratings Range

| | | 60 Hz |
|----------|-----|-------|
| Standby: | kW | 3250 |
| | kVA | 4062 |
| Prime: | kW | 2950 |
| | kVA | 3688 |

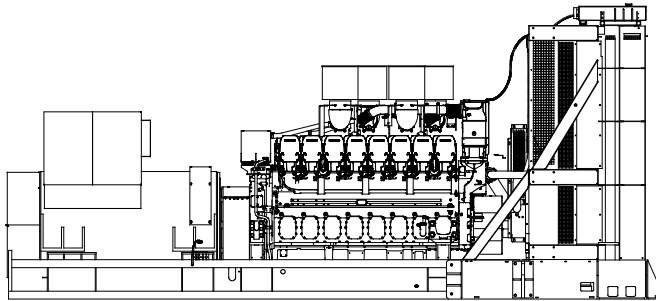

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- Approved for use with certified renewable Hydrotreated Vegetable Oil (HVO) / Renewable Diesel (RD) fuels compliant with EN15940 / ASTM D975.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A standard three-year or 1000-hour limited warranty for standby applications. Five-year basic, five-year comprehensive, and ten-year extended limited warranties are also available.
- A standard two-year or 8700-hour limited warranty for prime power applications.
- Other features:
 - Kohler designed controllers for one-source system integration and remote communication. See Controllers on page 4.
 - The low coolant level shutdown prevents overheating (standard on radiator models only).

General Specifications

| | |
|---|--|
| Orderable Generator Model Number | GMKD3250 |
| Manufacturer | Kohler |
| Engine: model | KD83V16 |
| Alternator Choices | KH07631TO4D KH07632TO4D KH07640TO4D KH08590TO4D KH09390TO4D KH09370TO4D |
| Performance Class | Per ISO 8528-5 |
| One Step Load Acceptance | 100% |
| Voltage | 480 V, 600 V, 4160 V, 6600 V, or 12470- 13800 V |
| Controller | APM603, APM802 |
| Fuel Consumption, L/hr (gal./hr) 100% at Standby | 820 (216.6) |
| Fuel Consumption, L/hr (gal./hr) 100% at Prime Power | 771 (203.7) |
| Emission Level Compliance (KDxxxx) | Tier 2 |
| Open Unit Noise Level @ 7 m dB(A) at Rated Load | 99 |
| Data Center Continuous (DCC) Rating (Refer to TIB-101 for definitions) | Same as the Standby Rating below |

Generator Set Ratings

| Alternator | Voltage | Ph | Hz | 130°C Rise Standby Rating | | 105°C Rise Prime Rating | |
|-------------|------------|----|----|------------------------------|------|----------------------------|------|
| | | | | kW/kVA | Amps | kW/kVA | Amps |
| KH07631TO4D | 2400/4160 | 3 | 60 | 3250/4062 | 564 | 2950/3688 | 512 |
| | 3810/6600 | 3 | 60 | 3250/4062 | 356 | 2950/3688 | 323 |
| | 7200/12470 | 3 | 60 | 3250/4062 | 189 | 2950/3688 | 171 |
| | 7620/13200 | 3 | 60 | 3250/4062 | 178 | 2950/3688 | 162 |
| | 7970/13800 | 3 | 60 | 3250/4062 | 170 | 2950/3688 | 155 |
| KH07632TO4D | 7200/12470 | 3 | 60 | 3250/4062 | 189 | 2950/3688 | 171 |
| KH07640TO4D | 277/480 | 3 | 60 | 3250/4060 | 4887 | 3250/4060 | 4887 |
| KH08590TO4D | 277/480 | 3 | 60 | 3250/4060 | 4887 | 3250/4060 | 4887 |
| | 347/600 | 3 | 60 | 3250/4060 | 3910 | 3250/4060 | 3910 |
| KH09390TO4D | 277/480 | 3 | 60 | 3250/4060 | 4887 | 3250/4060 | 4887 |
| KH09370TO4D | 2400/4160 | 3 | 60 | 3250/4062 | 564 | 2950/3688 | 512 |
| | 3810/6600 | 3 | 60 | 3250/4062 | 356 | 2950/3688 | 323 |

RATINGS: All three-phase units are rated at 0.8 power factor. **Standby Ratings:** The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. **Prime Power Ratings:** At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.



Industrial Diesel Generator Set - KD3250

Tier 2 EPA-Certified for Stationary Emergency Applications

| Engine Specifications | 60 Hz |
|---|---|
| Manufacturer | Kohler |
| Engine: model | KD83V16 |
| Engine: type | 4-Cycle, Turbocharged, Intercooled |
| Cylinder arrangement | 16-V |
| Displacement, L (cu. in.) | 83 (5048) |
| Bore and stroke, mm (in.) | 175 x 215 (6.89 x 8.46) |
| Compression ratio | 16.0:1 |
| Piston speed, m/min. (ft./min.) | 774 (2539) |
| Main bearings: quantity, type | 9, Precision Half Shells |
| Rated rpm | 1800 |
| Max. power at rated rpm, kWm (BHP) | 3490 (4680) |
| Cylinder head material | Cast Iron |
| Crankshaft material | Steel |
| Valve (exhaust) material | Steel |
| Governor: type, make/model | KODEC Electronic Control |
| Frequency regulation, no-load to-full load | Isochronous |
| Frequency regulation, steady state | ±0.25% |
| Frequency | Fixed |
| Air cleaner type, all models | Dry |
| Lubricating System | 60 Hz |
| Type | Full Pressure |
| Oil pan capacity with filter (initial fill), L (qt.) § | 420 (444) |
| Oil filter: quantity, type § | 8, Cartridge |
| Oil cooler | Water-Cooled |
| § Kohler recommends the use of Kohler Genuine oil and filters. | |
| Fuel System | 60 Hz |
| Fuel supply line, min. ID, mm (in.) | 25 (1.0) |
| Fuel return line, min. ID, mm (in.) | 19 (0.75) |
| Max. fuel flow, Lph (gph) | 1050 (277.4) |
| Min./max. fuel pressure at engine supply connection, kPa (in. Hg) | - 30/30 (- 8.8/8.8) |
| Maximum diesel fuel lift, m (ft.) | 3.7 (12) |
| Max. return line restriction, kPa (in. Hg) | 30 (8.9) |
| Fuel filter: quantity, type | 3, Primary Engine Filter 2, Fuel/Water Separator |
| Recommended fuel | #2 Diesel ULSD / RD / HVO |

| Fuel Consumption** | 60 Hz |
|-----------------------------|----------------|
| Diesel, Lph (gph) at % load | Standby Rating |
| 100% | 820 (216.6) |
| 75% | 726 (191.9) |
| 50% | 482 (127.4) |
| 25% | 278 (73.5) |
| Diesel, Lph (gph) at % load | Prime Rating |
| 100% | 771 (203.7) |
| 75% | 642 (169.7) |
| 50% | 466 (123.2) |
| 25% | 243 (64.1) |

** Fuel consumption is up to 4% higher when using HVO/RD than #2 ULSD.

| Radiator System | 60 Hz EPA Tier 2 | 60 Hz Low NOx EPA Tier 2 |
|--|---------------------|--------------------------------|
| Ambient temperature, °C (°F) | 50 (122) | |
| Engine jacket water capacity, L (gal.) | 375 (99) | |
| Radiator system capacity, including engine, L (gal.) | 1192 (315) | |
| Engine jacket water flow, Lpm (gpm) | 2707 (715) | |
| Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.) | 1170 (66537) | 1263 (71890) |
| Charge cooler water flow, Lpm (gpm) | 700 (185) | |
| Heat rejected to charge cooling water at rated kW, dry exhaust, kW (Btu/min.) | 970 (55163) | 1096 (62384) |
| Water pump type | Centrifugal | |
| Fan diameter, including blades, mm (in.) | 2438 (96) | |
| Fan, kWm (HP) | 100 (134) | |
| Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O) | 0.125 (0.5) | |

| Remote Radiator System† | 60 Hz |
|--|-----------------------|
| Exhaust manifold type | Dry |
| Connection sizes: | Class 150 ANSI Flange |
| Water inlet/outlet, mm (in.) | 216 (8.5) Bolt Circle |
| Intercooler inlet/outlet, mm (in.) | 178 (7.0) Bolt Circle |
| Static head allowable above engine, kPa (ft. H ₂ O) | 250 (83.6) |

† Contact your local distributor for cooling system options and specifications based on your specific requirements.

| Exhaust System | 60 Hz |
|--|-----------------|
| Exhaust flow at rated kW, m ³ /min. (cfm) | 676 (23873) |
| Exhaust temperature at rated kW at 25°C (77°F) ambient, dry exhaust, °C (°F) | 489 (912) |
| Maximum allowable back pressure, kPa (in. Hg) | 8.5 (2.5) |
| Exh. outlet size at eng. hookup, mm (in.) | See ADV drawing |

| Electrical System | 60 Hz |
|--|---|
| Battery charging alternator: | |
| Ground (negative/positive) | Negative |
| Volts (DC) | 24 |
| Ampere rating | 140 |
| Starter motor qty. at starter motor power rating, rated voltage (DC) | Standard: 2 @ 9 kW, 24; Redundant (optional); 2 @ 15 kW, 24 |
| Battery, recommended cold cranking amps (CCA): | |
| Quantity, CCA rating each, type (with standard starters) | 4, 1110, AGM |
| Quantity, CCA rating each, type (with redundant starters) | 8, 1110, AGM |
| Battery voltage (DC) | 12 |

| Air Requirements | 60 Hz |
|--|---------------|
| Radiator-cooled cooling air, m ³ /min. (scfm)‡ | 3823 (135000) |
| Cooling air required for generator set when equipped with city water cooling or remote radiator, based on 14°C (25°F) rise, m ³ /min. (scfm)‡ | 1214 (42887) |
| Combustion air, m ³ /min. (cfm) | 257 (9059) |
| Heat rejected to ambient air: | |
| Engine, kW (Btu/min.) | 160 (9099) |
| Alternator, kW (Btu/min.) | 179 (10200) |

‡ Air density = 1.20 kg/m³ (0.075 lbm/ft³)


| Alternator Specifications | 60 Hz |
|--|--|
| Type | 4-Pole, Rotating-Field |
| Exciter type | Brushless, Permanent-Magnet Pilot Exciter |
| Voltage regulator | Solid-State, Volts/Hz |
| Insulation: | NEMA MG1, UL 1446, Vacuum Pressure Impregnated (VPI) |
| Material | Class H, Synthetic, Nonhygroscopic |
| Temperature rise | 130°C, 150°C Standby |
| Bearing: quantity, type | 2, Sealed |
| Coupling type | Coupling |
| Amortisseur windings | Full |
| Alternator winding type | Form Wound |
| Rotor balancing | 125% |
| Voltage regulation, no-load to full-load | ±0.25% |
| Unbalanced load capability | 100% of Rated Standby Current |
| Peak motor starting kVA: | (35% dip for voltages below) |
| 480 V | KH07640TO4D 8996 |
| 480 V | KH08590TO4D 11616 |
| 480 V | KH09390TO4D 11214 |
| 6600 V | KH09370TO4D 10755 |
| 12470 V | KH07632TO4D 11395 |
| 13800 V | KH07631TO4D 11757 |

Alternator Standard Features

- The pilot-excited, permanent magnet (PM) alternator provides superior short-circuit capability.
- All models are brushless, rotating-field alternators.
- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Superior voltage waveform from two-thirds pitch windings and skewed stator.
- Brushless alternator with brushless pilot exciter for excellent load response.

NOTE: See TIB- 102 Alternator Data Sheets for alternator application data and ratings, efficiency curves, voltage dip with motor starting curves, and short circuit decrement curves.

Controllers

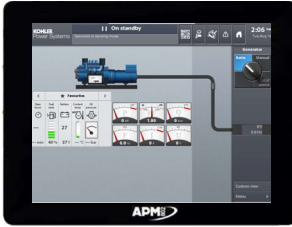

APM802 Controller

Provides advanced control, system monitoring, and system diagnostics for optimum performance and compatibility.

- 12-inch graphic display with touch screen and menu control provide easy local data access
- Measurements are selectable in metric or English units
- User language is selectable
- Two USB ports allow connection of a flash drive, mouse, or keypad
- Electrical data, mechanical data, and system settings can be saved to a flash drive
- Ethernet port allows connection to a PC type computer or Ethernet switch
- The controller supports Modbus® RTU and TCP protocols
- NFPA 110 Level 1 capability

Refer to G6-152 for additional controller features and accessories.

Modbus® is a registered trademark of Schneider Electric.



APM603 Controller

Provides advanced control, system monitoring, and system diagnostics for optimum performance and compatibility.

- 7-inch graphic display with touch screen and menu control provides easy local data access
- Measurements are selectable in metric or English units
- Paralleling capability to control up to 8 generators on an isolated bus with first-on logic, synchronizer, kW and kVAR load sharing, and protective relays
Note: Parallel with other APM603 controllers only
- Generator management to turn paralleled generators off and on as required by load demand
- Load management to connect and disconnect loads as required
- Controller supports Modbus® RTU, Modbus® TCP, SNMP and BACnet®
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- UL-listed overcurrent protective device
- NFPA 110 Level 1 capability

Refer to G6-162 for additional controller features and accessories.

BACNet® is a registered trademark of ASHRAE.

Codes and Standards

- Engine-generator set is designed and manufactured in facilities certified to ISO 9001.
- Generator set meets NEMA MG1, BS5000, ISO, DIN EN, and IEC standards, NFPA 110.
- Engine generator set is tested to ISO 8528-5 for transient response.
- The generator set and its components are prototype-tested, factory-built, and production-tested.

Third-Party Compliance

- Tier 2 EPA-Certified for Stationary Emergency Applications

Available Approvals and Listings

- California HCAI Pre-Approval
- CSA Certified
- IBC Seismic Certification
- UL 2200 Listing
- cULus

Warranty Information

- A standard three-year or 1000-hour limited warranty for standby applications. Five-year basic, five-year comprehensive, and ten-year extended limited warranties are also available.
- A standard two-year or 8700-hour limited warranty for prime power applications.

Available Warranties for Standby Applications

- 5-Year Basic Limited Warranty
- 5-Year Comprehensive Limited Warranty
- 10-Year Major Components Limited Warranty

Standard Features

- Closed Crankcase Ventilation (CCV) Filters
- Customer Connection
- Local Emergency Stop Switch
- Oil Drain and Coolant Drain Extension
- Operation and Installation Literature
- Fan Bearing Grease Extension
- Fuel/Water Separator
- Generator Heater
- Spring Isolation Under the Skid

Available Options

Circuit Breakers

- | Type | Rating |
|---|---------------------------------|
| <input type="checkbox"/> Electronic Trip (LI) | <input type="checkbox"/> 100% |
| <input type="checkbox"/> Electronic Trip with Ground Fault (LSIG) | <input type="checkbox"/> Manual |

Enclosed Remote Mounted Circuit Breakers

- NEMA 1 (4000-5000 A)

Engine Type

- KDxxxx Tier 2 EPA-Certified Engine
- KDxxxx-F Fuel Optimized Engine
- KDxxxx Tier 2 NOx Optimized EPA-Certified Engine (contact factory)

Approvals and Listings

- California HCAI Pre-Approval
- CSA Certified
- IBC Seismic Certification
- UL 2200 Listing
- cULus

Open Unit

- Exhaust Silencer, Critical
- Exhaust Silencer, Hospital
- Flexible Exhaust Connector, Stainless Steel

Controller

- Input/Output, Digital
- Load Shed (APM802 only)
- Manual Key Switch
- Remote Emergency Stop Switch
- Lockable Emergency Stop Switch
- Remote Serial Annunciator Panel

Cooling System

- Block Heater; 10500 W, 208 V, (Select 1 Ph or 3 Ph) *
- Block Heater; 12000 W, 240 V, (Select 1 Ph or 3 Ph) *
- Block Heater; 12000 W, 380 V, 3 Ph *
- * Required for Ambient Temperatures Below 5°C (41°F).

Electrical System

- Battery, AGM (kit with qty. 4)
- Battery Charger
- Battery Rack and Cables
- Redundant Starters

Fuel System

- Flexible Fuel Lines
- Restriction Gauge (for fuel/water separator)

Literature

- General Maintenance
- NFPA 110
- Overhaul
- Production

Miscellaneous

- Air Cleaner, Heavy Duty (loose)
- Air Cleaner Restriction Indicator
- Automatic Oil Replenishment System
- Engine Fluids (oil and coolant) Added
- Rated Power Factor Testing

Warranty (Standby Applications only)

- 5-Year Basic Limited Warranty
- 5-Year Comprehensive Limited Warranty
- 10-Year Major Components Limited Warranty


Other

-
-

Dimensions and Weights

Overall Size, max., L x W x H, mm (in.): 7650 x 3172 x 3451
(301.2 x 124.9 x 135.8)

Weight, radiator model, max. wet, kg (lb.): 32513 (71707)

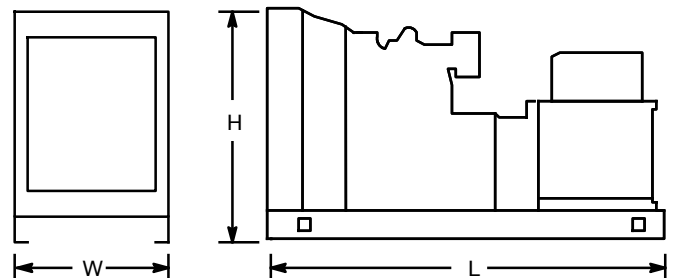

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.


KOHLER CO., Kohler, Wisconsin 53044 USA
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales and service outlet in the
US and Canada, phone 1-800-544-2444
KOHLERPower.com

Sound Level 2 Walk-In Enclosure Standard Features


- Kohler Factory Sound Attenuated, Aluminum Skin and Aluminum Frame Enclosure.
- Internal silencer, acoustic-lined air inlet, vertical outlet hood with 90° angles to redirect air and reduce noise
- Mounts to subbase fuel tank.
- Aluminum construction with four large, hinged doors for easy maintenance.
- Fade-, scratch-, and corrosion-resistant textured finish.
- Lockable, stainless steel external door latches, internal crash bar for exit.
- Door retention.
- Air inlet louvers to reduce rain and snow entry.
- Designed to meet or exceed 135 mph wind load rating.
- IBC Certified via analysis for site specific use.
- Roof snow loading capable of up to 341.7 kg/m² (70 lb/ft²).
- Fluid drains piped to the exterior of the enclosure.
- Acoustic insulation that meets UL 94 HF1 flammability classification.
- Cable entry access available either through the tank stub-in or through the top right or left side panels of the enclosure.
- Enclosure is capable of being split into three sections with one section independently removed in the field.

Subbase Fuel Tank Features

- The fuel tank has a black powder coat finish texture.
- The above-ground rectangular secondary containment tank mounts directly to the generator set, below the generator set skid (subbase).
- Provides walking surface within enclosure for generator set access.
- Both the inner and outer tanks have UL-listed emergency relief vents.
- Flexible fuel lines are provided.
- The containment tank's construction protects against fuel leaks or ruptures. The inner (primary) tank is sealed inside the outer (secondary) tank. The outer tank contains the fuel if the inner tank leaks or ruptures.
- The above ground secondary containment subbase fuel tank meets UL 142 requirements.
- Oil fogged tank interior for rust prevention.

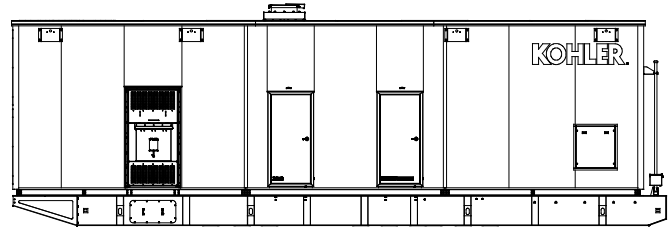

**Level 2 Sound Enclosure with Subbase Fuel Tank
(Shown with optional spill containment)**

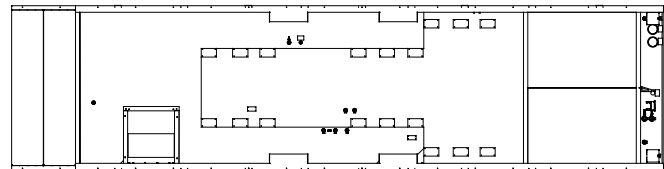

Subbase Fuel Tank (Top View)

DISTRIBUTED BY: